

 suprabeam®

D4_r



**1400
LUMENS**



Li-ion
19.2 Wh



400 g



120°/20°



IP65


410.1102

KEY FEATURES / UNIQUE SELLING POINTS (USP)



WATER RESISTANT AND DUSTPROOF - IP65

Tested according to IP65 ensures water resistant and dustproof protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



MAGNETIC

With the built in magnet in the handle of the D4r it can be fixed on any magnetic surface to use it as a fixed work light for hands free operation.



180° ADJUSTABLE LIGHT

The 180° flexible handle on the D4r ensures a very flexible og versatile worklight for multiple situations.



SPOT- AND FLOODLIGHT

The D4r has both a 20° spotlight and a 120° floodlight. Therefor it comes in handy for both inspection and for worklight.



HIGH CRI +80


The D4r has High CRI (+80) to bring out the true colors. With the High CRI the D4r provides the most natural colors to make the workday alot easier.



3 LED BATTERY INDICATORS

The 3 LED battery level indicators will indicate how much power is left in the D4r and when it needs to be recharged.

LIGHT CURVE AND RUNTIMES

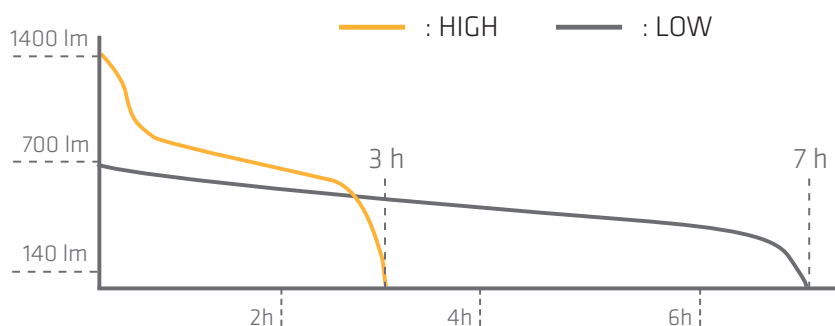

HIGH

1400 LUMENS	3 h
-------------	-----

MEDIUM

900 LUMENS	4 h 15 min
------------	--------------

LOW

450 LUMENS	7 h
------------	-----

SPOTLIGHT

400 LUMENS	6 h 30 min
------------	--------------

WHAT'S IN THE BOX

WORKLIGHT



ADAPTER



USB-C CABLE



PACKAGING



PACKAGING

Customs Tariff Number:	9405 4039
Packaging:	Carton Box
Single Box Content / Size / Weight:	1 pcs, Height/Width/Depth, 23.2/12.7/5 cm / 600 g
Master Box Content / Size / Weight:	12 pcs, 32 x 25 x 27.5 cm / 7.5 kg
Part. No.:	410.1102
EAN-CODE:	5704049908055

SPECIFICATIONS

LED / Focus Configuration:	Floodlight: High quality 15W COB LED, 6500K, SpotLight: High quality 5W SMD LED, 6500K
Case Material / Surface Treatment:	ZK Plastic durable housing
Case Color:	Black / Light Grey
Switch:	SPOTLIGHT, LOW, MEDIUM, HIGH
Dimensions:	H: 116mm, W: 101mm, D: 41.5
Weight incl. Battery:	400g
Ingress Protection/Impact Protection Rating:	Water- and Dustproof IP65 / IK07
Temperature (Operation):	-10°C to +40°C

ELECTRONICS

Built in Controller:	Yes, 4-step Controller by Press
Standard Power Source:	Li-ion 3.7V, 5200 mAh, 19.24 Wh
Charging Time:	4 hours 30 min
Beam Type / Distance:	180° Adjustable Handle / Spotlight: 125 m, Floodlight: 45 m
Luminous Flux:	High: 1400lm, Medium: 900lm, Low: 450lm / Spotlight: 400 lm
Lighting Time:	High: 3h, Medium: 4h 15 min, Low: 7h, Spotlight: 6h 30 min
Accessories Included:	110V -240V AC/DC Charger / 5V 2A, USB-C-Cable
Charging Temperature:	-0°C to +45°C

DIMENSIONS



4.15 cm



10.1 cm

11.6 cm

Distributor's Stamp:



Distributed worldwide by:

Steiner A/S
Dyssen 3
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212
www.suprabeam.com
info@suprabeam.com