


## Cable acero galvanizado

- **Composición 6x7+1.**
- **Servido en rollos o bobinas.**
- **∅ 2-3-4-5 mm.**

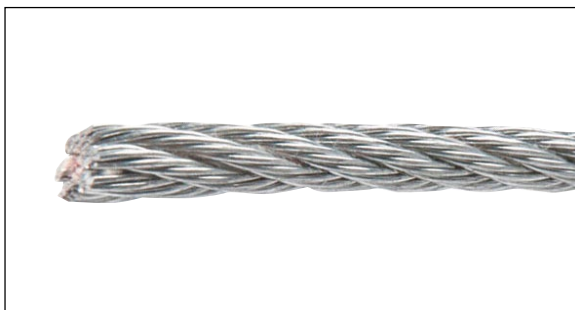

Código	Cable	Largo	Envase	Área sección transversal metálica	Fuerza mín. rotura kN 1960 N/mm <sup>2</sup>	Peso kg/100 m
2383K215	∅ 2 mm.	15 m.	ROLLO	1,48 mm <sup>2</sup>	2,35	1,38
2383K315	∅ 3 mm.	15 m.	ROLLO	3,32 mm <sup>2</sup>	5,29	3,11
2383K415	∅ 4 mm.	15 m.	ROLLO	5,90 mm <sup>2</sup>	9,40	5,52
2383K515	∅ 5 mm.	15 m.	ROLLO	9,23 mm <sup>2</sup>	14,70	8,63
2383K225	∅ 2 mm.	25 m.	ROLLO	1,48 mm <sup>2</sup>	2,35	1,38
2383K325	∅ 3 mm.	25 m.	ROLLO	3,32 mm <sup>2</sup>	5,29	3,11
2383K425	∅ 4 mm.	25 m.	ROLLO	5,90 mm <sup>2</sup>	9,40	5,52
2383K525	∅ 5 mm.	25 m.	ROLLO	9,23 mm <sup>2</sup>	14,70	8,63
2383K2100	∅ 2 mm.	100 m.	ROLLO	1,48 mm <sup>2</sup>	2,35	1,38
2383K3100	∅ 3 mm.	100 m.	ROLLO	3,32 mm <sup>2</sup>	5,29	3,11
2383K4100	∅ 4 mm.	100 m.	ROLLO	5,90 mm <sup>2</sup>	9,40	5,52
2383K5100	∅ 5 mm.	100 m.	ROLLO	9,23 mm <sup>2</sup>	14,70	8,63
2384K20	∅ 2 mm.	200 m.	BOBINA	1,48 mm <sup>2</sup>	2,35	1,38
2384K30	∅ 3 mm.	200 m.	BOBINA	3,32 mm <sup>2</sup>	5,29	3,11
2384K40	∅ 4 mm.	100 m.	BOBINA	5,90 mm <sup>2</sup>	9,40	5,52
2384K50	∅ 5 mm.	60 m.	BOBINA	9,23 mm <sup>2</sup>	14,70	8,63